

ZEROTECH

INSTRUCTION MANUAL

ZEROTECH MICRO REFLEX

THRIVE HD

WARNING

KEEP BATTERIES OUT OF REACH OF CHILDREN



**THIS PRODUCT CONTAINS A COIN BATTERY.
THE BATTERY CAN CAUSE SEVERE OR FATAL INJURIES IN
2 HOURS OR LESS IF IT IS SWALLOWED OR PLACED
INSIDE ANY PART OF THE BODY.**

CONTENTS

PAGES

- 4 INTRODUCTION
- 5 LIFETIME WARRANTY
- 6 THRIVE HD MICRO REFLEX SIGHT FEATURES
- 8 BATTERY INSTALLATION
- 9 FUNCTIONS
- 10 FITTING THE THDM21 TO YOUR FIREARM
- 12 WINDAGE AND ELEVATION ADJUSTMENTS
- 13 WARRANTY INFORMATION

INTRODUCTION

WELCOME TO THE ZEROTECH FAMILY!

Customer First - We listened to you and came up with a family of optics that will satisfy the needs of our most discerning and experienced customers.

Backed by Experience - ZeroTech enjoys 58 years of experience in the Optics Market supplying high quality brands to retailers throughout Australia and the Asia Pacific.

Built for the Australian Shooter - Designed and built to endure the harsh conditions of the Australian bush and the exacting demands of the precision shooter.

Lifetime Warranty - Be safe in the knowledge that your scope is backed by our Triple A Lifetime Warranty: **'ANY OWNER, ANY PROBLEM, ALWAYS COVERED'**.

LIFETIME WARRANTY

BACKED FOR LIFE!

Be safe in the knowledge that your scope is backed by our Triple A Lifetime Warranty:

- Fully transferable, covers accidental damage as well as defects in materials and workmanship.
- No receipt or warranty card is required.
- We will repair or replace product with equal or similar value and/or specifications.
- We will return product to you at no charge.



LIFETIME WARRANTY

'ANY OWNER, ANY PROBLEM,
ALWAYS COVERED'

THRIVE HD MICRO REFLEX SIGHT FEATURES




THDM21 MICRO REFLEX



RUBBER COVER

THRIVE HD MICRO REFLEX SIGHT FEATURES

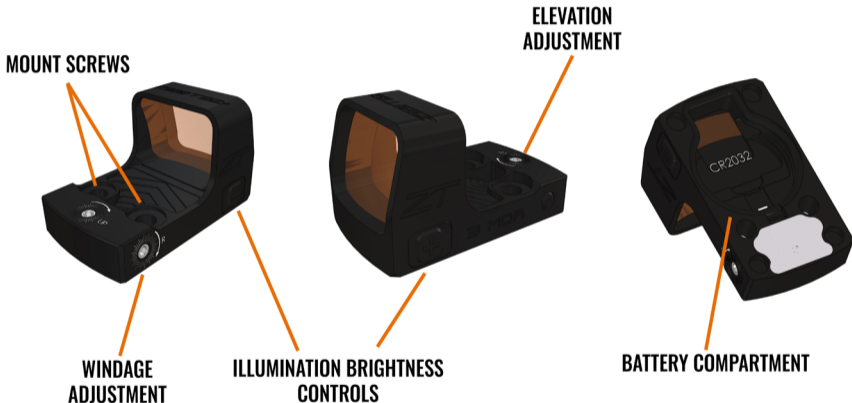

BATTERY INSTALLATION

1. The Thrive HD Micro Reflex has three different sets of mounting screws included. Please ensure you choose the correct set of screws for your application.
2. Install the CR2032 battery battery compartment, located on the base of the Micro Reflex. Note: the battery orientation is indicated by the symbol in the battery compartment.
3. Continue on to optic installation on page 11.

WARNING – KEEP BATTERIES (whether the battery is new or used) **OUT OF REACH OF CHILDREN**

Zerotech rifle scopes and optics with a reticle illumination feature contain coin batteries. Products containing coin batteries must be kept out of reach of children. The battery can cause severe or fatal injuries in 2 hours or less if it is swallowed or placed inside any part of the body. If you suspect your child has swallowed or inserted a button battery immediately call the 24-hour Poisons Information Centre on

13 11 26 (Australia) for fast, expert advice.



FUNCTIONS

- ▲ To activate the THDM21 reflex sight, briefly depress the (+) illumination brightness control button.
- ▲ Use either of the illumination brightness control buttons (+ or -) to adjust the brightness settings. There is a total of 10 illumination brightness settings.
- ▲ The THDM21 reflex sight has an auto sleep/ auto activate function. If the sight is left undisturbed for 3 minutes, it will automatically enter sleep mode. As soon as the sight detects motion, it will resume the previously selected brightness setting.
- ▲ To shut down the THDM21 reflex sight, press and hold the (-) illumination brightness control button for 3 seconds. You will need to activate the sight by briefly pressing the (+) button again before the next use.

FITTING THE THDRS28 TO YOUR FIREARM

BEFORE MOUNTING YOUR SCOPE TO A FIREARM, IT IS ESSENTIAL THAT YOU CONFIRM THAT YOUR FIREARM IS UNLOADED AND NO AMMUNITION IS PRESENT IN YOUR WORKSPACE.

TO AVOID DAMAGE AND TO PRESERVE YOUR WARRANTY, YOUR SCOPE SHOULD ALWAYS BE MOUNTED BY AN EXPERIENCED PROFESSIONAL.

FITTING THE THDM21 TO YOUR FIREARM

- ▲ Fit the Thrive HD Micro Reflex to the mount or mounting plate, taking care not to dislodge the battery.
- ▲ Once the Micro Reflex is located on the mounting plate, insert the selected screw set, and use a T10 Torx driver to tighten the screws to the torque settings specified by the mount or mounting plate manufacturer.
- ▲ Note: the use of thread locking compound is recommended.



WINDAGE AND ELEVATION ADJUSTMENTS

- ▲ Windage and elevation adjustments can be made by using a 1.5mm hex key to turn the hex screws highlighted in the diagram.
- ▲ Turning the screws will shift your bullet impact in the direction indicated on the sight.



WARRANTY & CONTACT INFORMATION

Company details;

ZEROTECH INTERNATIONAL PTY LTD

For all enquiries:

AUSTRALIA / INTERNATIONAL

Ph: +612 9938 3244

Email: sales@zerotech.com.au

Web: zerotech.com.au/warranty

Address:

PO BOX 7200,

Warringah Mall

NSW, 2100, AUSTRALIA

USA

Ph: 615-674-4755

Email: sales@zerotechoptics.com

Web: zerotechoptics.com/warranty

NOTES



zerotech.com.au / zerotechoptics.com





LIFETIME WARRANTY

'ANY OWNER, ANY PROBLEM, ALWAYS COVERED'

zerotech.com.au / zerotechoptics.com



ZERO-TECH 2022 | Specifications subject to change without notice